



MWS500 Wind Shield

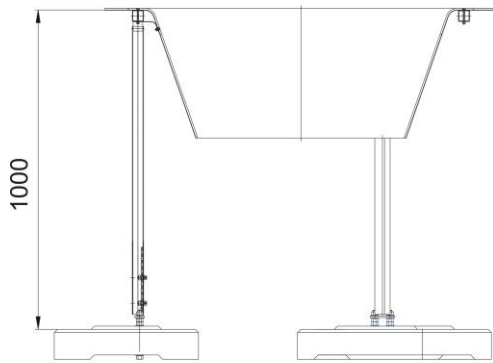

The MWS500 wind shield is used for rain gauges with 500 cm² or 200 cm² catching area. It serves for reduction of the wind influence on the catching of the precipitation. Namely for solid precipitation in winter season in the first place.

The wind shield can be installed on prepared concrete foundation, special concrete foundation tiles or on MES500 extensible stand. It is whole made from noncorrosive material (stainless steel or dural).

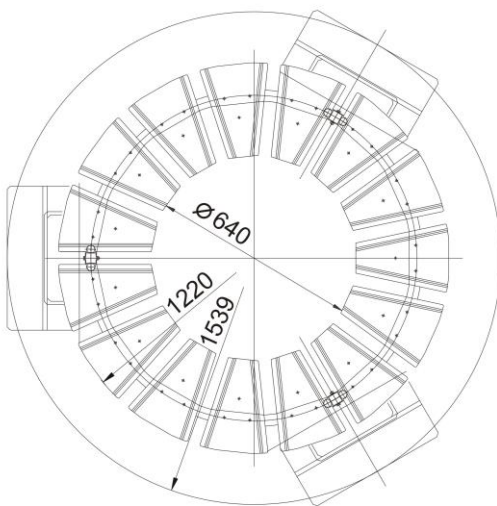

The example of the wind shield installed together with the MRW500 weighing rain gauge on the extensible stand.





Lamellae which creates shield are closely movable



Overview of the shield with base, vertical rods and lamellae.